



Using IP Office 1603 Phones

Notices

© 2026 Avaya LLC. All Rights Reserved.

You may, at your own risk, assemble a MyDocs collection solely for your own internal business purposes, which constitutes a modification to the original published version of the publications. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of publications. You agree to defend, indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, your modifications, additions or deletions to the publications.

A single topic or a collection of topics may come from multiple Avaya publications. All of the content in your collection is subject to the legal notices and disclaimers in the publications from which you assembled the collection. For information on licenses and license types, trademarks, and regulatory statements, see the original publications from which you copied the topics in your collection.

Except where expressly stated by Avaya otherwise, no use should be made of materials provided by Avaya on this site. All content on this site and the publications provided by Avaya including the selection, arrangement and design of the content is owned by Avaya and/or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. Avaya owns all right, title and interest to any modifications, additions or deletions to the content in the Avaya publications.

Notice

While reasonable efforts have been made to ensure that the information in this document is complete and accurate at the time of printing, Avaya assumes no liability for any errors. Avaya reserves the right to make changes and corrections to the information in this document without the obligation to notify any person or organization of such changes.

Documentation disclaimer

"Documentation" means information published in varying mediums which may include product information, operating instructions and performance specifications that are generally made available to users of products. Documentation does not include marketing materials. Avaya shall not be responsible for any modifications, additions, or deletions to the original published version of Documentation unless such modifications, additions, or deletions were performed by or on the express behalf of Avaya. End User agrees to indemnify and hold harmless Avaya, Avaya's agents, servants and employees against all claims, lawsuits, demands and judgments arising out of, or in connection with, subsequent modifications, additions or deletions to this documentation, to the extent made by End User.

Link disclaimer

Avaya is not responsible for the contents or reliability of any linked websites referenced within this site or Documentation provided by Avaya. Avaya is not responsible for the accuracy of any information, statement or content provided on these sites and does not necessarily endorse the products, services, or information described or offered within them. Avaya does not guarantee that these links will work all the time and has no control over the availability of the linked pages.

Warranty

Avaya provides a limited warranty on Avaya hardware and software. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language, as well as information regarding support for this product while under warranty is available to Avaya customers and other parties through the Avaya Support website: <https://support.avaya.com/helpcenter/getGenericDetails?detailId=C20091120112456651010> under the link "Warranty & Product Lifecycle" or such successor site as designated by Avaya. Please note that if You acquired the product(s) from an authorized Avaya Channel Partner outside of the United States and Canada, the warranty is provided to You by said Avaya Channel Partner and not by Avaya.

"Hosted Service" means an Avaya hosted service subscription that You acquire from either Avaya or an authorized Avaya Channel Partner (as applicable) and which is described further in Hosted SAS or other service description documentation regarding the applicable hosted service. If You purchase a Hosted Service subscription, the foregoing limited warranty may not apply but You may be entitled to support services in connection with the Hosted Service as described further in your service description documents for the applicable Hosted Service. Contact Avaya or Avaya Channel Partner (as applicable) for more information.

Hosted Service

THE FOLLOWING APPLIES ONLY IF YOU PURCHASE AN AVAYA HOSTED SERVICE SUBSCRIPTION FROM AVAYA OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE), THE TERMS OF USE FOR HOSTED SERVICES ARE AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/licenseinfo) UNDER THE LINK "Avaya Terms of Use for Hosted Services" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, AND ARE APPLICABLE TO ANYONE WHO ACCESSES OR USES THE HOSTED SERVICE. BY ACCESSING OR USING THE HOSTED SERVICE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE DOING SO (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THE TERMS OF USE. IF YOU ARE ACCEPTING THE TERMS OF USE ON BEHALF A COMPANY OR OTHER LEGAL ENTITY, YOU REPRESENT THAT YOU HAVE THE AUTHORITY TO BIND SUCH ENTITY TO THESE TERMS OF USE. IF YOU DO NOT HAVE SUCH AUTHORITY, OR IF

YOU DO NOT WISH TO ACCEPT THESE TERMS OF USE, YOU MUST NOT ACCESS OR USE THE HOSTED SERVICE OR AUTHORIZE ANYONE TO ACCESS OR USE THE HOSTED SERVICE.

Licenses

THE SOFTWARE LICENSE TERMS AVAILABLE ON THE AVAYA WEBSITE, [HTTPS://SUPPORT.AVAYA.COM/LICENSEINFO](https://support.avaya.com/licenseinfo), UNDER THE LINK "AVAYA SOFTWARE LICENSE TERMS (Avaya Products)" OR SUCH SUCCESSOR SITE AS DESIGNATED BY AVAYA, ARE APPLICABLE TO ANYONE WHO DOWNLOADS, USES AND/OR INSTALLS AVAYA SOFTWARE, PURCHASED FROM AVAYA INC., ANY AVAYA AFFILIATE, OR AN AVAYA CHANNEL PARTNER (AS APPLICABLE) UNDER A COMMERCIAL AGREEMENT WITH AVAYA OR AN AVAYA CHANNEL PARTNER. UNLESS OTHERWISE AGREED TO BY AVAYA IN WRITING, AVAYA DOES NOT EXTEND THIS LICENSE IF THE SOFTWARE WAS OBTAINED FROM ANYONE OTHER THAN AVAYA, AN AVAYA AFFILIATE OR AN AVAYA CHANNEL PARTNER; AVAYA RESERVES THE RIGHT TO TAKE LEGAL ACTION AGAINST YOU AND ANYONE ELSE USING OR SELLING THE SOFTWARE WITHOUT A LICENSE. BY INSTALLING, DOWNLOADING OR USING THE SOFTWARE, OR AUTHORIZING OTHERS TO DO SO, YOU, ON BEHALF OF YOURSELF AND THE ENTITY FOR WHOM YOU ARE INSTALLING, DOWNLOADING OR USING THE SOFTWARE (HEREINAFTER REFERRED TO INTERCHANGEABLY AS "YOU" AND "END USER"), AGREE TO THESE TERMS AND CONDITIONS AND CREATE A BINDING CONTRACT BETWEEN YOU AND AVAYA INC. OR THE APPLICABLE AVAYA AFFILIATE ("AVAYA").

Avaya grants You a license within the scope of the license types described below, with the exception of Heritage Nortel Software, for which the scope of the license is detailed below. Where the order documentation does not expressly identify a license type, the applicable license will be a Designated System License as set forth below in the Designated System(s) License (DS) section as applicable. The applicable number of licenses and units of capacity for which the license is granted will be one (1), unless a different number of licenses or units of capacity is specified in the documentation or other materials available to You. "Software" means computer programs in object code, provided by Avaya or an Avaya Channel Partner, whether as stand-alone products, pre-installed on hardware products, and any upgrades, updates, patches, bug fixes, or modified versions thereto. "Designated Processor" means a single stand-alone computing device. "Server" means a set of Designated Processors that hosts (physically or virtually) a software application to be accessed by multiple users. "Instance" means a single copy of the Software executing at a particular time: (i) on one physical machine; or (ii) on one deployed software virtual machine ("VM") or similar deployment.

License type(s)

Designated System(s) License (DS). End User may install and use each copy or an Instance of the Software only: 1) on a number of Designated Processors up to the number indicated in the order; or 2) up to the number of Instances of the Software as indicated in the order, Documentation, or as authorized by Avaya in writing. Avaya may require the Designated Processor(s) to be identified in the order by type, serial number, feature key, Instance, location or other specific designation, or to be provided by End User to Avaya through electronic means established by Avaya specifically for this purpose.

Concurrent User License (CU). End User may install and use the Software on multiple Designated Processors or one or more Servers, so long as only the licensed number of Units are accessing and using the Software at any given time as indicated in the order, Documentation, or as authorized by Avaya in writing. A "Unit" means the unit on which Avaya, at its sole discretion, bases the pricing of its licenses and can be, without limitation, an agent, port or user, an e-mail or voice mail account in the name of a person or corporate function (e.g., webmaster or helpdesk), or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software. Units may be linked to a specific, identified Server or an Instance of the Software.

Cluster License (CL). End User may install and use each copy or an Instance of the Software only up to the number of Clusters as indicated on the order, Documentation, or as authorized by Avaya in writing with a default of one (1) Cluster if not stated.

Enterprise License (EN). End User may install and use each copy or an Instance of the Software only for enterprise-wide use of an unlimited number of Instances of the Software as indicated on the order, Documentation, or as authorized by Avaya in writing.

Named User License (NU). End User may: (i) install and use each copy or Instance of the Software on a single Designated Processor or Server per authorized Named User (defined below); or (ii) install and use each copy or Instance of the Software on a Server so long as only authorized Named Users access and use the Software as indicated in the order, Documentation, or as authorized by Avaya in writing. "Named User", means a user or device that has been expressly authorized by Avaya to access and use the Software. At Avaya's sole discretion, a "Named User" may be, without limitation, designated by name, corporate function (e.g., webmaster or helpdesk), an e-mail or voice mail account in the name of a person or corporate function, or a directory entry in the administrative database utilized by the Software that permits one user to interface with the Software.

Shrinkwrap License (SR). End User may install and use the Software in accordance with the terms and conditions of the applicable license agreements, such as "shrinkwrap" or "clickthrough" license accompanying or applicable to the Software ("Shrinkwrap License") as indicated in the order, Documentation, or as authorized by Avaya in writing.

Transaction License (TR). End User may use the Software up to the number of Transactions as specified during a specified time period and as indicated in the order, Documentation, or as authorized by Avaya in writing. A "Transaction" means the unit by which Avaya, at its sole discretion, bases the pricing of its licensing and can be, without limitation, measured by the usage, access, interaction (between client/server or customer/organization), or operation of the Software within a specified time period (e.g. per hour, per day, per month). Some examples of Transactions include but are not limited to each greeting played/message waiting enabled, each personalized promotion (in any channel), each callback operation, each live agent or web chat session, each call routed or redirected (in any channel). End User may not exceed the number of Transactions without Avaya's prior consent and payment of an additional fee.

Heritage Nortel Software

"Heritage Nortel Software" means the software that was acquired by Avaya as part of its purchase of the Nortel Enterprise Solutions Business in December 2009. The Heritage Nortel Software is the software contained within the list of Heritage Nortel Products located at <https://support.avaya.com/LicenseInfo> under the link "Heritage Nortel Products" or such successor site as designated by Avaya. For Heritage Nortel Software, Avaya grants Customer a license to use Heritage Nortel Software provided hereunder solely to the extent of the authorized activation or authorized usage level, solely for the purpose specified in the Documentation, and solely as embedded in, for execution on, or for communication with Avaya equipment. Charges for Heritage Nortel Software may be based on extent of activation or use authorized as specified in an order or invoice.

Copyright

Except where expressly stated otherwise, no use should be made of materials on this site, the Documentation, Software, Hosted Service, or hardware provided by Avaya. All content on this site, the documentation, Hosted Service, and the product provided by Avaya including the selection, arrangement and design of the content is owned either by Avaya or its licensors and is protected by copyright and other intellectual property laws including the sui generis rights relating to the protection of databases. You may not modify, copy, reproduce, republish, upload, post, transmit or distribute in any way any content, in whole or in part, including any code and software unless expressly authorized by Avaya. Unauthorized reproduction, transmission, dissemination, storage, and or use without the express written consent of Avaya can be a criminal, as well as a civil offense under the applicable law.

Virtualization

The following applies if the product is deployed on a virtual machine. Each product has its own ordering code and license types. Unless otherwise stated, each Instance of a product must be separately licensed and ordered. For example, if the end user customer or Avaya Channel Partner would like to install two Instances of the

same type of products, then two products of that type must be ordered.

Third Party Components

"Third Party Components" mean certain software programs or portions thereof included in the Software or Hosted Service may contain software (including open source software) distributed under third party agreements ("Third Party Components"), which contain terms regarding the rights to use certain portions of the Software ("Third Party Terms"). As required, information regarding distributed Linux OS source code (for those products that have distributed Linux OS source code) and identifying the copyright holders of the Third Party Components and the Third Party Terms that apply is available in the products, Documentation or on Avaya's website at: <https://support.avaya.com/Copyright> or such successor site as designated by Avaya. The open source software license terms provided as Third Party Terms are consistent with the license rights granted in these Software License Terms, and may contain additional rights benefiting You, such as modification and distribution of the open source software. The Third Party Terms shall take precedence over these Software License Terms, solely with respect to the applicable Third Party Components to the extent that these Software License Terms impose greater restrictions on You than the applicable Third Party Terms.

The following applies only if the H.264 (AVC) codec is distributed with the product. THIS PRODUCT IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO (i) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (ii) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Service Provider

THE FOLLOWING APPLIES TO AVAYA CHANNEL PARTNER'S HOSTING OF AVAYA PRODUCTS OR SERVICES. THE PRODUCT OR HOSTED SERVICE MAY USE THIRD PARTY COMPONENTS SUBJECT TO THIRD PARTY TERMS AND REQUIRE A SERVICE PROVIDER TO BE INDEPENDENTLY LICENSED DIRECTLY FROM THE THIRD PARTY SUPPLIER. AN AVAYA CHANNEL PARTNER'S HOSTING OF AVAYA PRODUCTS MUST BE AUTHORIZED IN WRITING BY AVAYA AND IF THOSE HOSTED PRODUCTS USE OR EMBED CERTAIN THIRD PARTY SOFTWARE, INCLUDING BUT NOT LIMITED TO MICROSOFT SOFTWARE OR CODECS, THE AVAYA CHANNEL PARTNER IS REQUIRED TO INDEPENDENTLY OBTAIN ANY APPLICABLE LICENSE AGREEMENTS, AT THE AVAYA CHANNEL PARTNER'S EXPENSE, DIRECTLY FROM THE APPLICABLE THIRD PARTY SUPPLIER.

WITH RESPECT TO CODECS, IF THE AVAYA CHANNEL PARTNER IS HOSTING ANY PRODUCTS THAT USE OR EMBED THE H.264 CODEC OR H.265 CODEC, THE AVAYA CHANNEL PARTNER ACKNOWLEDGES AND AGREES THE AVAYA CHANNEL PARTNER IS RESPONSIBLE FOR ANY AND ALL RELATED FEES AND/OR ROYALTIES. THE H.264 (AVC) CODEC IS LICENSED UNDER THE AVC PATENT PORTFOLIO LICENSE FOR THE PERSONAL USE OF A CONSUMER OR OTHER USES IN WHICH IT DOES NOT RECEIVE REMUNERATION TO: (I) ENCODE VIDEO IN COMPLIANCE WITH THE AVC STANDARD ("AVC VIDEO") AND/OR (II) DECODE AVC VIDEO THAT WAS ENCODED BY A CONSUMER ENGAGED IN A PERSONAL ACTIVITY AND/OR WAS OBTAINED FROM A VIDEO PROVIDER LICENSED TO PROVIDE AVC VIDEO. NO LICENSE IS GRANTED OR SHALL BE IMPLIED FOR ANY OTHER USE. ADDITIONAL INFORMATION FOR H.264 (AVC) AND H.265 (HEVC) CODECS MAY BE OBTAINED FROM MPEG LA, L.L.C. SEE [HTTP://WWW.MPEGLA.COM](http://www.mpegla.com).

Compliance with Laws

You acknowledge and agree that it is Your responsibility for complying with any applicable laws and regulations, including, but not limited to laws and regulations related to call recording, data privacy, intellectual property, trade secret, fraud, and music performance rights, in the country or territory where the Avaya product is used.

Preventing Toll Fraud

“Toll Fraud” is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there can be a risk of Toll Fraud associated with your system and that, if Toll Fraud occurs, it can result in substantial additional charges for your telecommunications services.

Avaya Toll Fraud intervention

If You suspect that You are being victimized by Toll Fraud and You need technical assistance or support, call Technical Service Center Toll Fraud Intervention Hotline at +1-800-643-2353 for the United States and Canada. For additional support telephone numbers, see the Avaya Support website: <https://support.avaya.com> or such successor site as designated by Avaya.

Security Vulnerabilities

Information about Avaya's security support policies can be found in the Security Policies and Support section of <https://support.avaya.com/security>.

Suspected Avaya product security vulnerabilities are handled per the Avaya Product Security Support Flow (<https://support.avaya.com/css/P8/documents/100161515>).

Trademarks

The trademarks, logos and service marks (“Marks”) displayed in this site, the Documentation, Hosted Service(s), and product(s) provided by Avaya are the registered or unregistered Marks of Avaya, its affiliates, its licensors, its suppliers, or other third parties. Users are not permitted to use such Marks without prior written consent from Avaya or such third party which may own the Mark. Nothing contained in this site, the Documentation, Hosted Service(s) and product(s) should be construed as granting, by implication, estoppel, or otherwise, any license or right in and to the Marks without the express written permission of Avaya or the applicable third party.

Avaya is a registered trademark of Avaya Inc.

All non-Avaya trademarks are the property of their respective owners.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

Contents

Chapter 1: Navigation	6
LED button indicators.....	8
Icons in the telephone display.....	9
Paper labels.....	9
Avaya menu.....	10
Chapter 2: Operation	12
Telephone safety and other considerations.....	12
Making a call.....	12
Redialing a telephone number.....	12
Answering a call.....	13
Muting a call.....	13
Putting a call on hold.....	13
Transferring a call.....	14
Conference calls.....	14
Working with conference calls.....	14
Accessing voice mail messages.....	15
Chapter 3: Additional Help and Documentation	16
Getting Help.....	16
Getting Help.....	16
Additional Documentation.....	17

Chapter 1: Navigation

The following image shows the key controls on the phone.

Some features described in this document might not be available on your phone. If you find that a feature is not available, contact your system administrator.

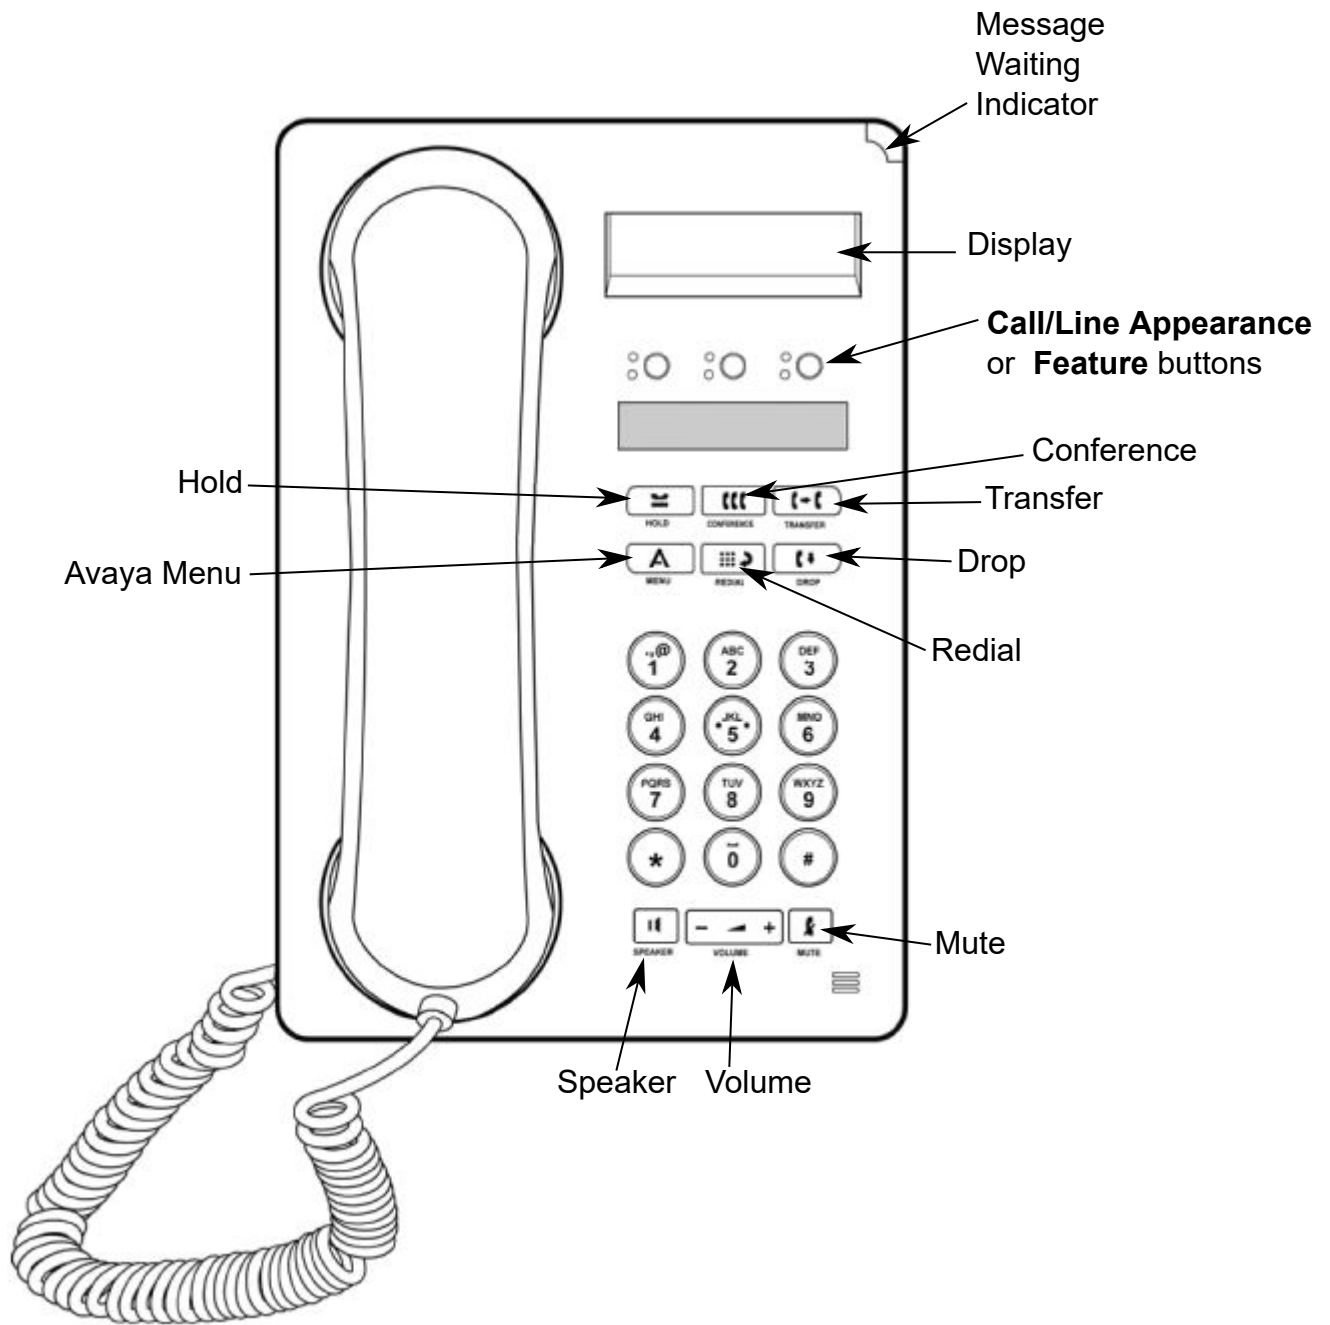


Figure 1: Phone controls

Phone controls	Description
Message Waiting Indicator (MWI)	An illuminated red light in the upper-right corner of your phone indicates you have voice mail messages waiting. If Visual Alerting is enabled, this light flashes when you receive an incoming call.

Table continues...

Phone controls	Description
Avaya menu	Press the A button to access the Avaya menu. See Avaya menu on page 10. Press the button again to exit the Avaya menu.
Redial button	Press to dial the last number you called.
Hold button	Press to put the active call on hold.
Conference button	Press to add another party to an existing call.
Transfer button	Press to transfer a call to another number.
Drop button	Press to drop the active call. While on a conference call, press Drop to drop the last person added to the conference call.
Volume button	Press + or - while active on the handset or speaker to adjust the volume. To adjust the volume of the ringer, press + or - on the Volume button while the handset and speaker are inactive.
Mute button	Press to mute a call in progress. To take a call off mute, press Mute again.
Speaker button	Press to use the speaker phone. To take a call off speaker phone, lift the handset.
Feature and Call appearance buttons	There are three buttons that can be programmed by the system administrator as either Call appearance or Feature buttons. Press a Call appearance button to make or answer a call or resume a call on hold. Press a labeled feature button to enable or disable that feature. Typically, two buttons are administered as Call appearance buttons and one button is administered as a Feature button. The Feature button provides access to an Avaya call management system feature that has been administered for your extension. The green LED next to the Feature button indicates if the feature is currently on or off. If the light is on, the feature is on.

LED button indicators

Each button has two LEDs, one green and one red, to indicate the status of the button. The status is identified by whether the LED is turned on, off, or blinking as described in the following tables.

Appearance button LEDs









LED status	Description
Steady green	Call appearance is active.
Slow blinking green	Call appearance is ringing.
Fast blinking green	Call appearance is on hold.
Very fast blinking green	Conference or call transfer is pending.
Steady red	Call appearance is selected and will be used when the phone is off the hook. The indicator remains steady red while you use the call appearance.
Off	Call appearance is available.

Feature button LEDs

LED status	Description
Steady green	Feature is active.
Blinking green	Feature is pending. The request is being processed and not immediately available.
Off	Feature is not active.

Icons in the telephone display

Icons are provided in the phone display to indicate the state of a call and navigation choices. The icons in the phone display are described in the following table.

Icon	Description
	Call forward or Send All Calls is active. * Note: These features are only available if they have been administered for your telephone.
	Incoming call is ringing.
	Call is active.
	Call is on hold.
	Call is on soft hold. This icon appears when you are using the Conference or Transfer feature.
	Conference is active.
	Conference is on hold.
	Scroll up or down for other options.

Paper labels

Paper labels are next to buttons on the telephone. The label identifies the feature that your administrator has programmed for the button. You can remove and change paper labels or write on a blank paper label.

Printed labels are also available for your telephone. For more information about printed labels, contact your system administrator.


Avaya menu

You can use the Avaya menu to adjust and customize phone settings, select the display language, view network settings, and log out.

Avaya menu on the 1603 telephone

Menu	Option	Description
Screen	Bright	Adjust the display brightness.
	Contrast	Adjust the display contrast.
	Visual alert	Enable or disable the flashing that appears when an incoming call is waiting to be answered.
Sounds	Ring type	Select the ringing sound.
	Clicks	Enable or disable the clicks heard when moving around phone menus.
	Error tones	Enable or disable the tones heard when using phone menus.
Advanced	Backups	Force a manual backup of your phone settings.
	Restore	Force a manual restore of your phone settings.
	Handset	Enable or disable automatic control for the handset.
	Speaker	Enable or disable automatic control for the speaker.
	Language	Select a language for the phone menus. The languages available depend on the languages that are installed.
Network info	Audio info	View information about the current call.
	IP info	View IP address settings for the phone.
	QoS	Views the QoS settings that the phone uses.
	Interface	View Ethernet LAN connection settings for the phone.

Table continues...

Menu	Option	Description
Log out		<p>Remove the phone registration to the telephone system.</p> <p> Important:</p> <p>Avaya recommends that this option is not used. Use the telephone systems own login and logout controls. Consult with your system administrator.</p>

Chapter 2: Operation

Telephone safety and other considerations

Warning:

- The handset might pick up small metal objects, such as pins or staples.
- During a power surge, EFT or ESD, calls may be dropped. After a power surge, EFT or ESD, it is normal for the phone to restart.
- Using a cell phone, mobile phone, GSM phone or two-way radio in close proximity to an Avaya telephone might cause interference.
- Avoid connecting your phone directly to the outdoor telecommunication network.

Making a call

About this task

Use the following process to make a new call when not already on a call.

Procedure

1. Lift the handset.
2. Press **Speaker** or an available line button.
3. Dial the number you want to call.

Redialing a telephone number

Procedure

Press **Redial** to call the last number dialed.

Answering a call

About this task

The telephone usually selects incoming calls automatically. However, if you are on another call or if you receive multiple incoming calls at a time, you might need to select the call you want to answer manually. Use one of the following methods to answer an incoming call.

- If you are not on another call, do one of the following:
 - Lift the handset
 - Press the call appearance with a flashing green LED for the incoming call
 - Press **Speaker** to answer the call on speakerphone.
- If you are on another call, press the call appearance with a flashing green LED for the incoming call.

 **Note:**

If your administrator has enabled the auto hold feature, you can answer a new call without putting the active call on hold.

If auto hold is not enabled, you must put the active call on hold before answering the new incoming call. Otherwise, the active call will drop when you answer the new call.

Muting a call

About this task

When you mute a call, the other party cannot hear you. If a call is on mute, and you switch between the handset, headset, or speakerphone, the mute is turned off.

- To put the call on mute, press **Mute**.
When the **Mute** button light is on, the call is muted.
- To turn off mute, press **Mute** again.

Putting a call on hold

- To put your active call on hold, press **Hold**.
A very fast blinking green LED appears next to the call appearance.
- To resume the call, press the call appearance button.

Transferring a call

About this task

You can transfer a call to a new user or simply transfer the call to an existing call on hold.

Procedure

1. If the call you want to transfer is not your active call, press the call appearance button for the call you want to transfer.
2. Press **Transfer**.

A very fast blinking green LED appears next to the call appearance. This indicates that the call is being transferred.
3. Do one of the following:
 - To transfer the call to another number, dial that number.
 - To transfer the call to a call on hold, press the call appearance button for the call on hold.
4. Press **Transfer** again or hang up to complete the transfer.

Conference calls

You can use conference calls to speak with up to three people in different locations on the same call. You might be able to access additional conference options with the Expanded Meet-Me Conferencing functionality. Contact your system administrator for more information about this option.

Working with conference calls

About this task

You can change a normal call to a conference call.

Procedure

1. To start a conference call, do the following:
 - a. In your active call, press **Conference**.

A very fast blinking green LED appears next to the call appearance.
 - b. Dial the telephone number.
 - c. Press **Conference** again to add the person to the call.
2. To put the call on hold, press **Hold**.

To resume the call, press the call appearance button.

3. To drop a conference participant, press **Drop**.
 - Press **#** to drop the person shown.
 - Press ***** to go to the next person.

Accessing voice mail messages

About this task

A red light on the upper right corner of your telephone indicates when you have new voice mail messages. Voice mail messages are an administered function. If you have questions, contact your system administrator.

Procedure

1. To log in to your voice mail, follow the instructions provided by your system administrator.
2. Once you are logged in, follow the voice prompts to access your messages.

Chapter 3: Additional Help and Documentation

The following pages provide sources for additional help.

Related links

[Getting Help](#) on page 16

[Getting Help](#) on page 16

[Additional Documentation](#) on page 17

Getting Help

Some IP Office features require you to enter information such as your user name, password, login code (security PIN), voicemail code (mailbox password).

Avaya cannot or reset the values for your passwords and codes. However, your system administrator can reset the values if necessary, either doing it themselves or through a request to your system's Avaya business partner.

Your system administrator also sets the rules your IP Office system uses for allowable passwords and codes. The same rules are applied to all users.

Related links

[Additional Help and Documentation](#) on page 16

Getting Help

Avaya sells IP Office through accredited business partners. Those business partners provide direct support to their customers and escalate issues to Avaya if necessary.

If you require further support, you should first contact your own system administrator. They are able to access the full configuration of the IP Office system, either themselves or through a request to your system's Avaya business partner.

Whilst your system administrator/reseller cannot see your existing passwords, they can reset them in order to allow you to login again and then change the value.

Related links

[Additional Help and Documentation](#) on page 16

Additional Documentation

The [Avaya Documentation Center](#) website contains user guides and manuals for Avaya products. The links below cover user guides that you may find useful.

Phone User Guides

- [IP Office J100 Series Phone User Guide](#) | [IP Office J100 Series Quick Reference](#)
- [IP Office 9600 Series Phone User Guide](#) | [IP Office 9600 Series Quick Reference](#)
- [IP Office Analog Phone User Guide](#)

Application Guides

- [Using Avaya Workplace Client for IP Office](#)
- [Using the IP Office User Portal](#)
- [Using one-X Portal for IP Office](#)
- [Using IP Office SoftConsole](#)

Voicemail Mailbox User Guides

- [Using a Voicemail Pro IP Office Mode Mailbox](#)
- [Using a Voicemail Pro Intuity Mode Mailbox](#)
- [Using IP Office Embedded Voicemail Intuity Mode](#)
- [Using IP Office Embedded Voicemail IP Office Mode](#)

Related links

[Additional Help and Documentation](#) on page 16

Index

A

Administrator	16
answer call	13
Avaya menu	10

B

Business Partners	16
-------------------------	--------------------

C

call	
conference	14
hold	13
inbound	13
incoming	13
mute	13
outbound	12
outgoing	12
pause	13
transfer	14
call last number	12
conference	14
start	14
considerations	12
controls	6

D

Documentation	17
---------------------	--------------------

F

forgotten password	16
--------------------------	--------------------

H

Help	16
hold	13

I

icons	
display	9
indicators	
LED	8

L

label	
-------	--

label (*continued*)

paper	9
printed	9
LED	8
login code	16

M

make call	12
conference	14
multi-party	14
Manuals	17
menu	
Avaya	10
messages	
voice mail	15
mute call	13

N

navigation	6
------------------	-------------------

P

password	16
phone	6

R

redial	12
Reseller	16

S

safety	12
security PIN	16
System Administrator	16

T

transfer call	14
---------------------	--------------------

U

User Guides	17
-------------------	--------------------

V

voice mail	
access	15
voicemail code	16